


Polyurethane timing belts

optibelt ALPHA Special stacker belts

The wide range of ALPHA Special timing belts has been extended by another component. Optibelt ALPHA Special stacker belts are primarily used in hygiene industry. They fulfil transport tasks, e.g. for the manufacture of sanitary towels. However, they are also used in the manufacture of conductor plates for ventilation of the individual circuit boards.

Optibelt manufactures the different shapes of cams and/or lugs to each customer's specifications. The cam's material is made of fibre-glass reinforced polyurethane and is applied to the base belt in two processes (welding or screwing). The customer can also utilise an existing range of basic cams/lugs.

Further profiles will be customised on request. In this process, the height of the cam must not exceed 250 mm and the width must not exceed 70 mm.

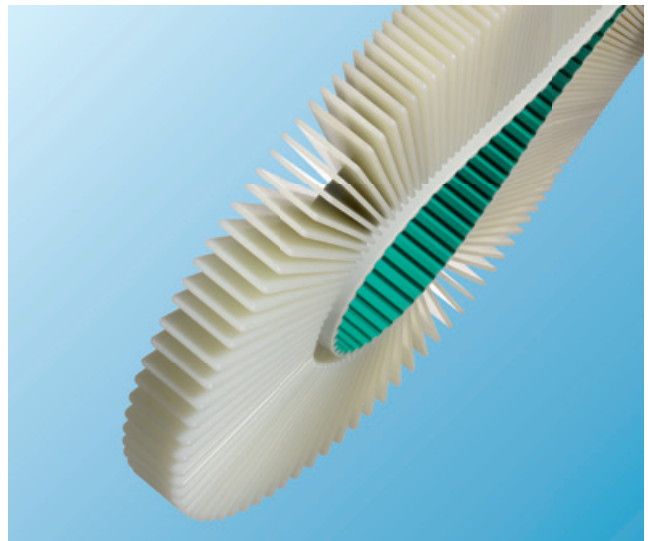

**ALPHA Special stacker belts –
more than just an alternative!**